


All measurements in mm.



Stationary MDFD 50-200	
A	1160
B	660
C	1600
D	660
E	772
Mobile MDFD 50-200	
A	1270
B	660
C	1710
D	660
E	772

Technical specifications MDFD	MDFD 50	MDFD 100	MDFD 150	MDFD 200
Installed power excl. DH [kW]	5.1/5.3	5.5/5.8	5.5/5.8	6.1/6.4
Blower motor, drying 3-phase 50/60 Hz [kW]	1.1/1.4	1.5/1.9	1.5/1.9	2.5
Air volume [m ³ /h] 50/60 Hz	50/60	100/120	150/180	200/210
Blower motor, regeneration 3-phase 50/60 Hz [kW]	0.37/0.44	0.37/0.44	0.37/0.44	0.37/0.44
Dew-point temp. [°C]	-30	-30	-30	-30
Heating element regeneration [kW]	2x3.5	2x3.5	2x3.5	2x3.5
Power consumption [kWh]	1.8-2.4	2.0-2.6	3.5-4.5	4.1-5.1
Noise level [dBA]	65	65	65	65
Connecting cable [m]	3	3	3	3

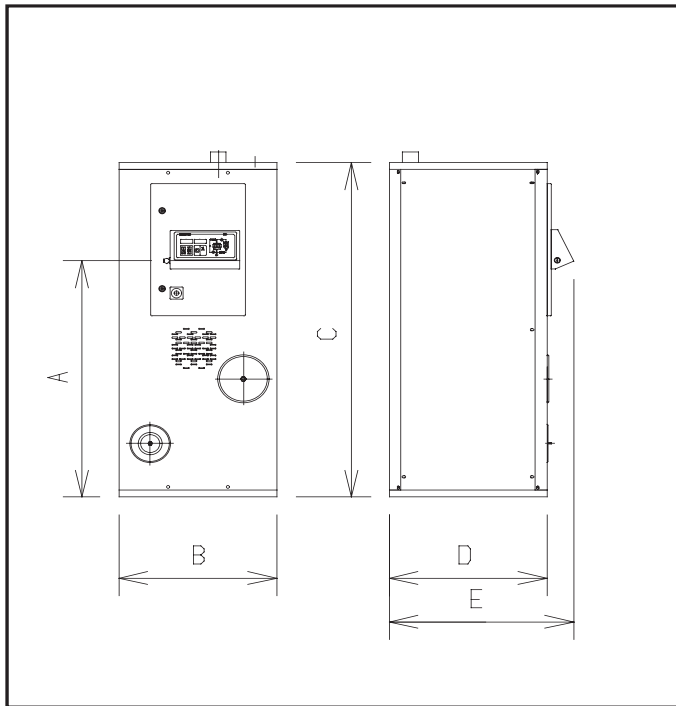

Labotek A/S
 Strøbjergvej 29
 DK-3600 Frederikssund
 Tel: +45 4821 8411
 Fax: +45 4821 8000
 E-mail: info@labotek.com
 www.labotek.com

Manufacturer's Representative: